


INSTRUMENT APPROACH
CHART - ICAO

AERODROME ELEV 256
HEIGHTS RELATED TO
THR RWY 26 - ELEV 256

APPROACH 124.200
TOWER 118.500
ATIS 129.050

**KAUNAS / INTL
LITHUANIA**
ILS or LOC RWY 26

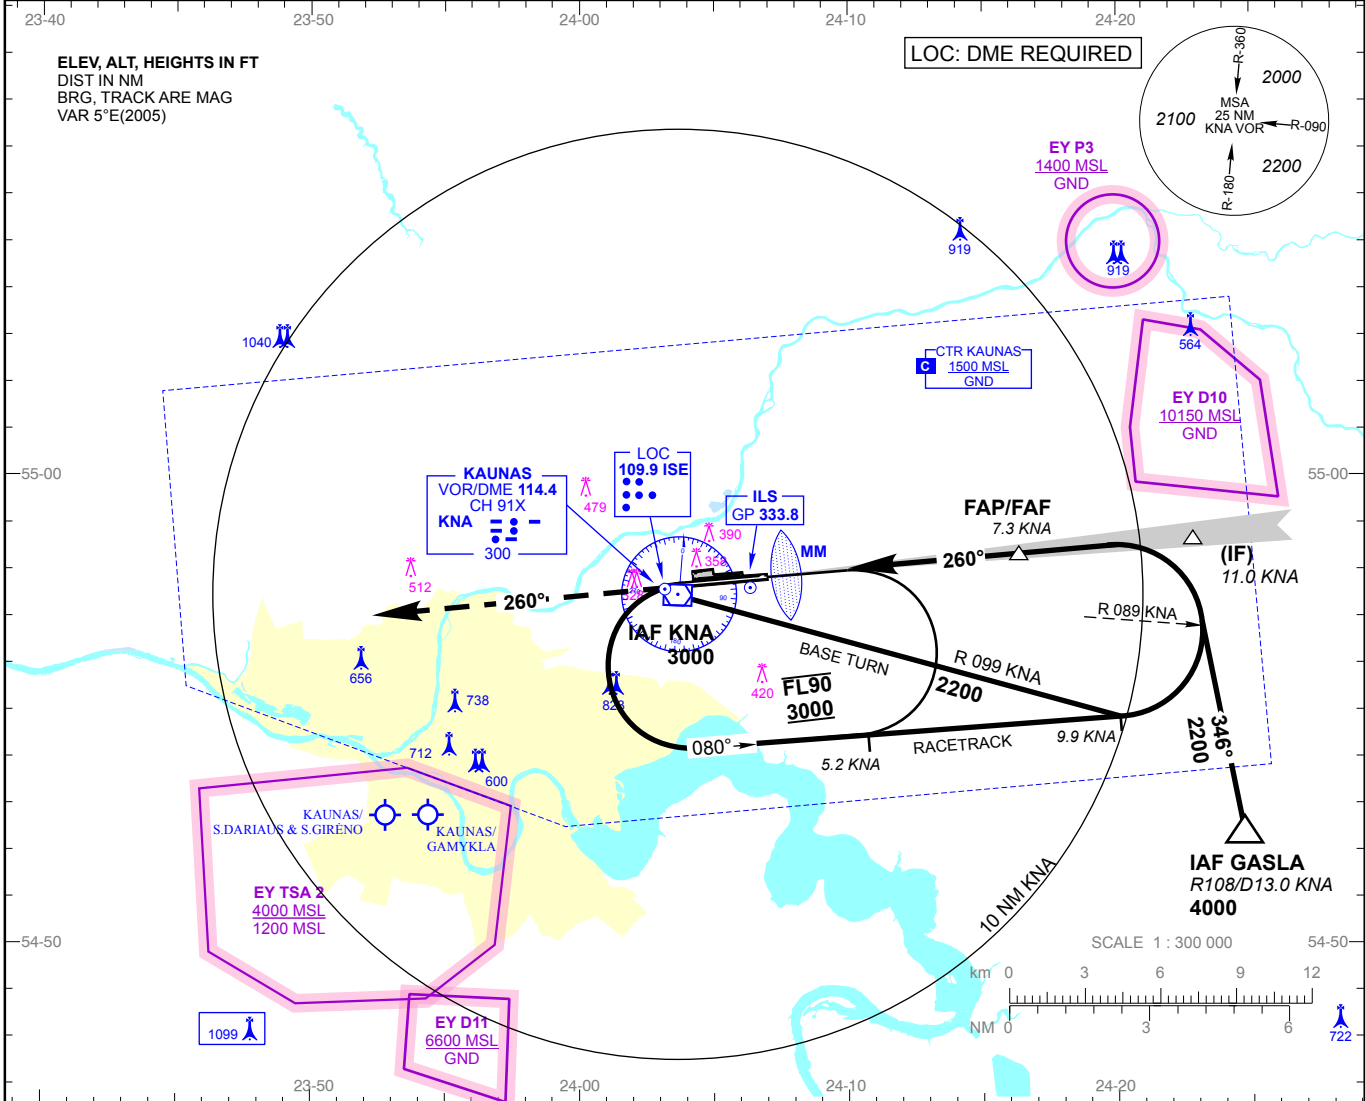

MISSED APPROACH PROCEDURE


Climb on track 260° to 3000,
radar vectoring will be provided

In case of RCF climb on
track 260° to 2200 at 8 NM KNA,
then turn right to KNA, climb to 3000.

THR ELEV 256

ILS RDH 51

NM to/from THR RWY 26

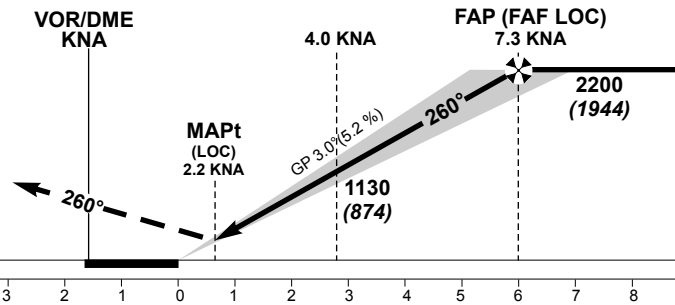

TRANSITION ALT 5000

FIX/POINTS COORDINATES

FAP/FAF	54 58 23.4N	024 16 30.6E
IF	54 58 41.7N	024 22 54.6E
GASLA	54 52 21.2N	024 24 32.1E
KNA	54 57 35.3N	024 03 55.1E
DTHR 26	54 57 53.80N	024 06 19.76E

DIST DME KNA

	7	6	5	4	3		
Altitude	2090	1770	1450	1130	810		
Height	(1834)	(1514)	(1194)	(874)	(554)		
GS	Kts	80	100	120	140	160	180
FAP - MAPt (5.1 NM)	min:sec	3:50	3:04	2:33	2:11	1:55	1:42
Rate of descent (5.2%)	ft/min	420	525	630	735	840	950

OCA(H)	A	B	C	D
STRAIGHT-IN	456 (200)			
APPROACH	570 (314)			
CIRCLING	100 KT	135 KT	180 KT	205 KT
	1120 (864)		1220 (964)	

Remark:
LOC - DME: timing not authorized for defining the MAPt.

Changes: new chart.